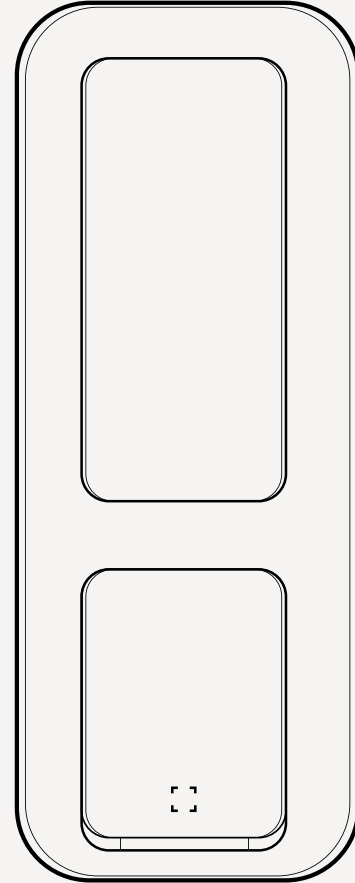# Kisi Terminal Pro ^{KD-QR1}

kısı

(BLE) (NFC) (QR)

Flexible unlock and check-in options—for members, contractors and guests.

Extend Kisi's award-winning Reader Pro to a check-in and QR or barcode terminal that supports different credentials such as mobile access, RFID, and NFC cards at the same time.

Width	Height	Depth
2.9" (7.5 cm)	9.6" in (24.5 cm)	1.3" (3.47 cm)

Unlock the next level of convenience.
Unify mobile and card unlock methods with versatile QR and barcode check-in and unlock options. Greet your users with convenience at the door. Enable even more unlock methods for ultimate flexibility of credential options and system design.

Easy to install, a joy to operate.
The easy-to-install Terminal Pro boasts a sleek design, Power over Ethernet (PoE), and an IP65 rating. The constant OTA updates make it a breeze to maintain, while the QR code functionality expands the operational possibilities.

All scenarios. All conditions.
Contactless access or 2FA? Access links or the familiar QR codes that work even if the reader loses internet connection? You decide! Enable single-use access for temporary visitors to your space with short-lived QR codes. Provide recurring visitors with continued access with long-lived QR codes.

Kisi Terminal Pro ^{KD-QR1}

Kisi Terminal Pro [KD-QR1]

(BLE) (NFC) (QR)

kisi

A familiar access experience for every user.

Hi,

Welcome to Kisi Inc! Door access at this company is powered by Kisi.

To unlock the doors, please scan the QR code below at a compatible Kisi QR Code Reader.

Your QR code is valid between Mar 13 2024, 11:15AM CET and Mar 24 2024, 03:15PM CET.

This QR code is uniquely generated for your account, please don't share it with anybody.

Kisi Terminal Pro ^{KD-QR1}

(BLE) (NFC) (QR)

Hardware, software, and features

kisi

Mechanical

Environmental specifications
- Operating temperature: −4°F to 122°F (-20℃ to 50℃)
- Storage temperature: −4°F to 185°F (-20℃ to 85℃)

Power
- Power over Ethernet (PoE)

Dimensions and color
- Length: 9.6 in (24.5 cm)
- Width: 2.9 in (7.5 cm)
- Depth: 1.3 in (3.47 cm)
- Weight: 8.82 oz (250 g)
- Color: Black

User feedback
- LED signaling
- Buzzer

Credentials

Access methods
- MotionSense
- Android and iOS smartphones (BLE, NFC)
- High frequency NFC encrypted Kisi cards, fobs, and tags (13.56 Mhz)
- Low frequency RFID cards, fobs, and tags (125 kHz)
- QR codes

Decode capability

1D barcode
- Codabar
- Code 11/39/93/128
- UPC-A/E0/E1
- EAN-8/13
- Interleaved 2 of 5
- Industrial 2 of 5
- Matrix 2 of 5
- MSI-Plessey
- GS1 Databar

2D barcode
- QR code
- Data Matrix
- PDF417

Reading angle
- Tilt 360°
- Skew ±65°
- Pitch ±60°

Field of view
- 28°(Horizontal)
- 21.5°(Vertical)

Reading speed
- 100 milliseconds
- Supports continuous reading

Reading assistant
- White illumination LED (250 lux Indoor)
- Red indicator LED

Connectivity

Supported resolutions
- Internet: Ethernet (PoE supported)
- LF/RFID, HF/NFC card read range: Up to 1.5 in (4 cm)
- NFC/BLE Tap to Unlock range: Up to 1.9 in (5 cm)
- QR code reading range: 1.4 in ~ 9.8 in (3.5 cm ~ 25 cm)